


CAM AND GROOVE COUPLINGS FOR LAYFLAT HOSE

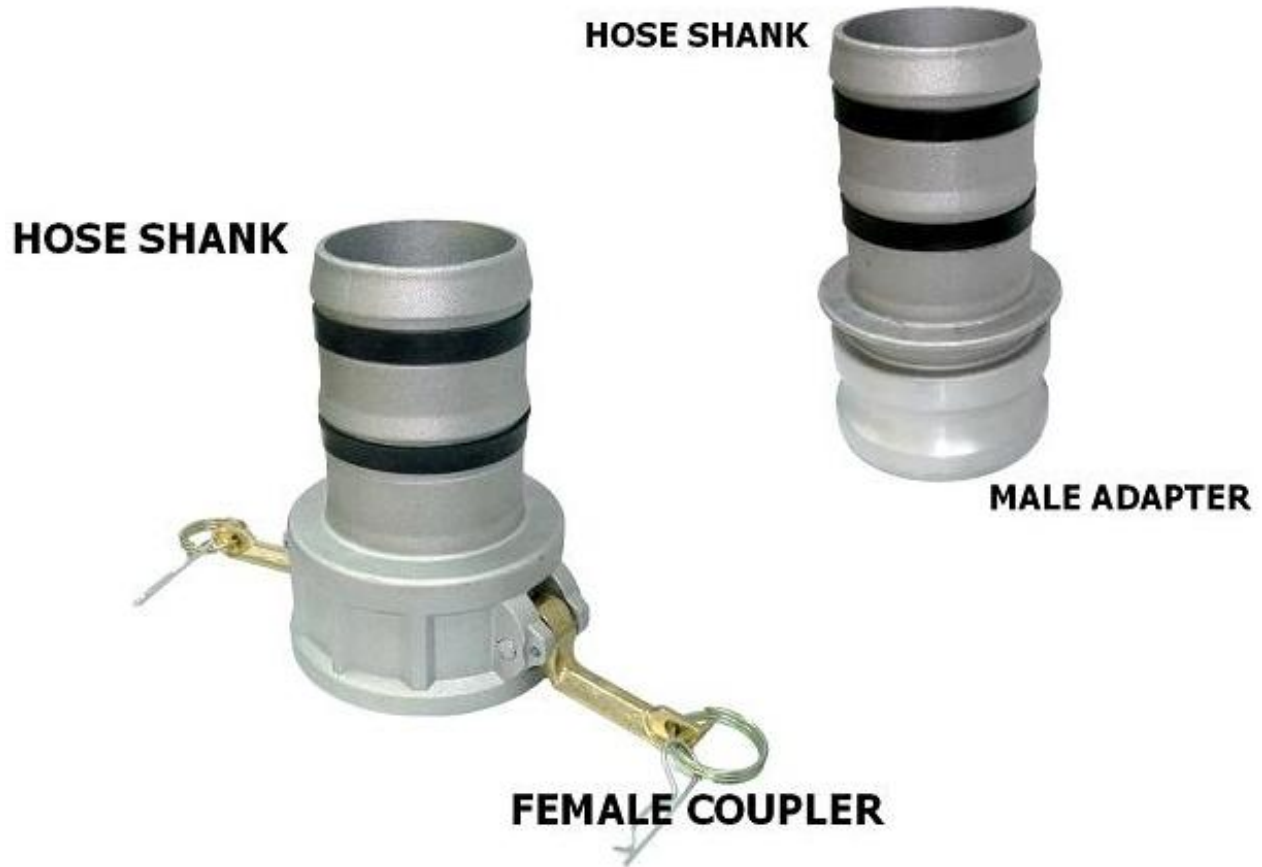

Application : For use with thin wall hose such as rubber or pvc layflat. The shank gaskets provide a superior seal eliminating the need for sealants.

Gasket Material : NBR

Gasket Temp. : -40C to +100C(-40F to +212F)

Casting Temp. : -101C to +121C(-150F to +250F)

Description	Weight (lbs)	Std Pack Qty	Part #
1-1/2" PART C ALUM LAYFLAT STYLE	0.81	30	CGCLF-150-A1
2" PART C ALUM LAYFLAT STYLE	1.06	20	CGCLF-200-A1
3" PART C ALUM LAYFLAT STYLE	2.07	10	CGCLF-300-A1
4" PART C ALUM LAYFLAT STYLE	3.30	4	CGCLF-400-A1
1-1/2" PART E ALUM LAYFLAT STYLE	.49	50	CGELF-150-A1
2" PART E ALUM LAYFLAT STYLE	.71	25	CGELF-200-A1
3" PART E ALUM LAYFLAT STYLE	1.47	12	CGELF-300-A1
4" PART E ALUM LAYFLAT STYLE	2.48	6	CGELF-400-A1